

- NL** - Nominal Length
- NW** - Nominal Width
- SL** - Square Level
- H** - Constructional height of the platform

PVC electrical conduit (min. Ø60) for electrical connections between dock leveler and control panel. Power supply: 3P+N+PE, recommended wire cross-section: 1,5 mm²
 At bumper fixation points forces of 59 kN to be expected on prefabricated concrete with 30 tons lorries and velocity of 5 km/h
 Preparation of the dock by the general contractor

Drew	S. Włóczyk	18.08.2022
Checked		
Approved		

NL	2000	2500	3000
NW	2000	2000	2000






F (kN)	
Load	60
F1	
F2	
F3	
F4	
F5	



Domek przeładunkowy
AMTR-D

NW x NH

* The drawing is an illustrative drawing, not made to scale. Detailed technical solutions may differ from the ones shown in the drawing.

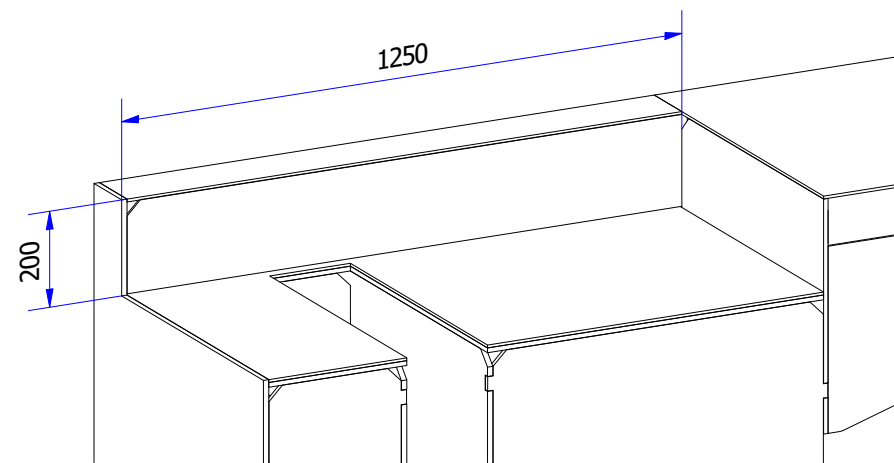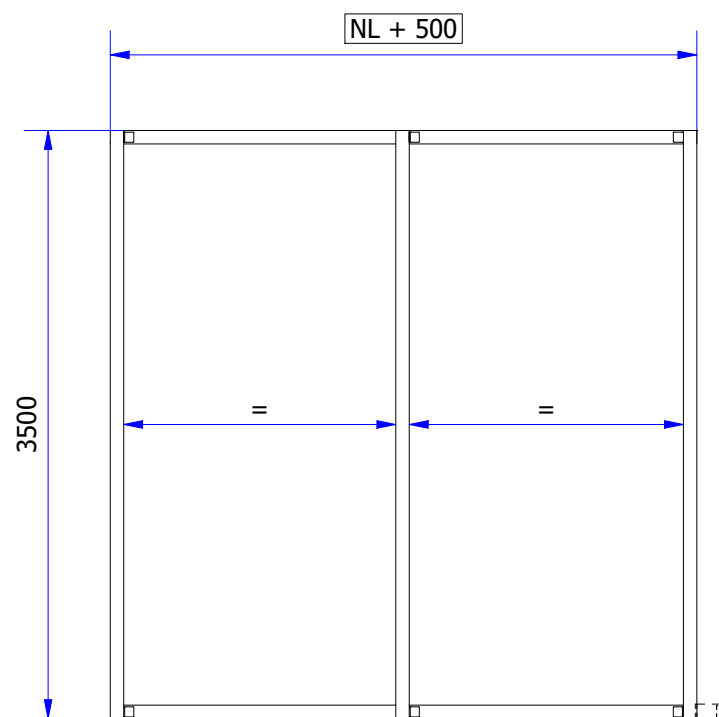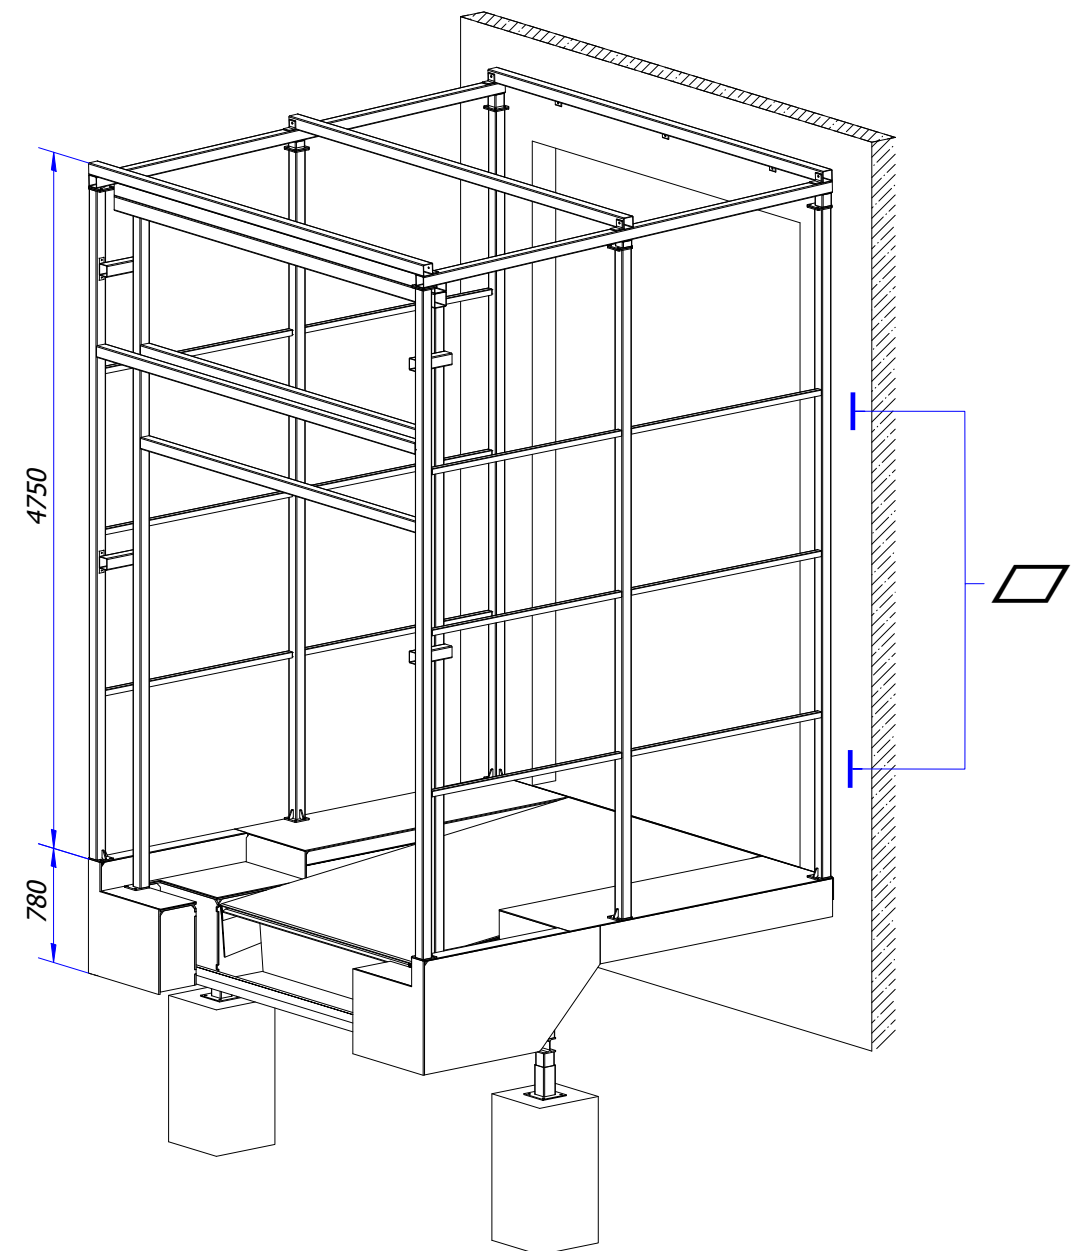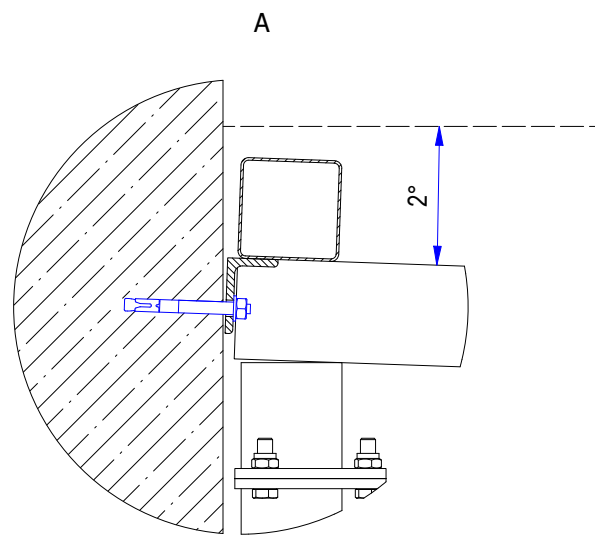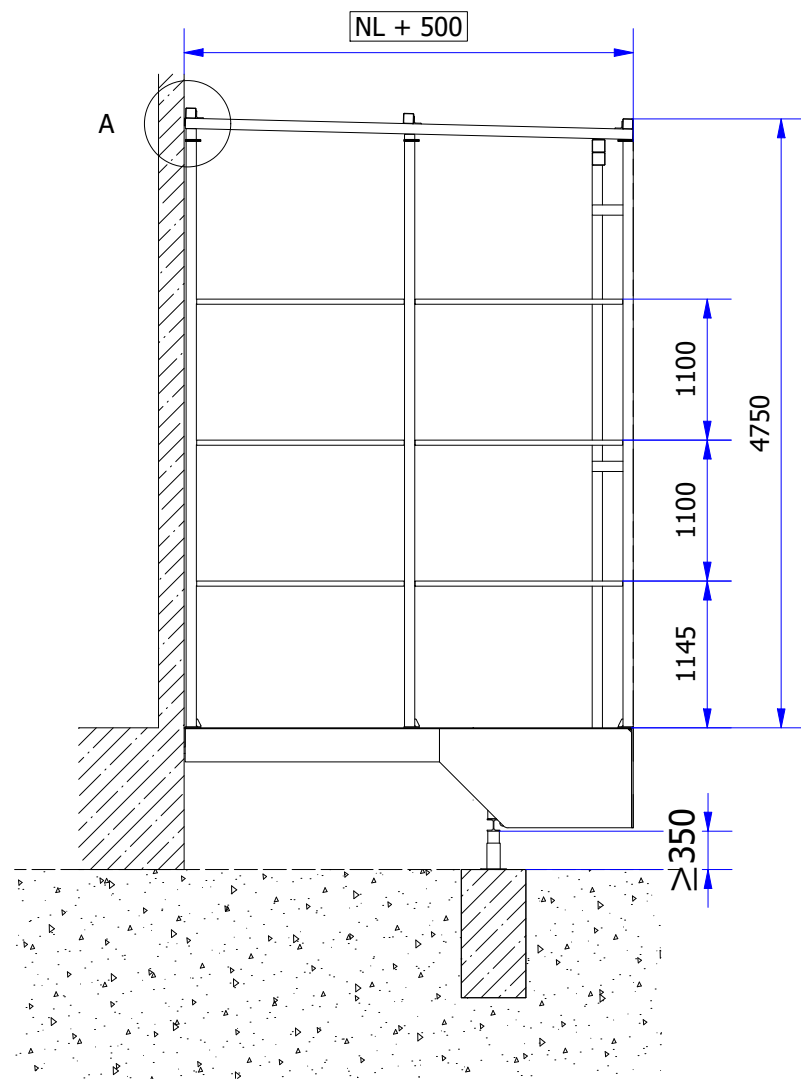

NL	2000	2500	3000
NW	2000	2000	2000

Drew	S. Włóczyk	18.08.2022
Checked		
Approved		



Domek przeladunkowy
AMTR-D

NW x NH

A3

▭ Maintain the flatness of the surface along the entire height of the house assembly

* The drawing is an illustrative drawing, not made to scale. Detailed technical solutions may differ from the ones shown in the drawing.